



# Light Efficiency:

19 Lumen/Watt

# Dominant Wavelength:

477nm

# Output:

455lm


# Power:

24.1W

# Peak:

10739cd

# Beam Angle

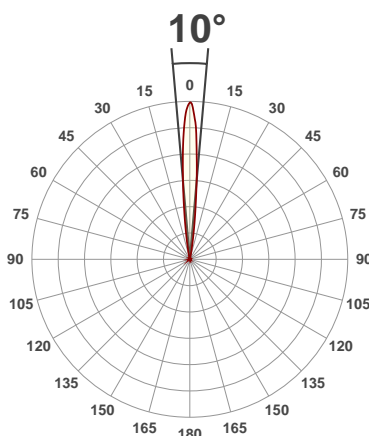

Product Name:

**64B LED PRO**

Test:


**Full On**

Date:


**1/16/2018**

Note:


Spectral Distribution

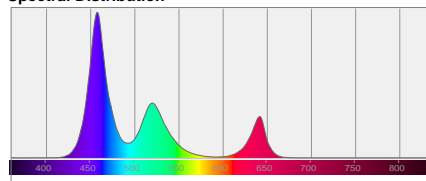

Color Coordinates



Zoom Color Point



Distance (meter)

1

Distance (feet)

3.3

2

6.6

3

9.8

4

13.1

5

16.4

Lux\*

10°

Foot Candles\*

\*measured at  
center of beam

Beam Width (meter)

Beam Width (feet)

Beam Angle 50%	Field Angle 10%	Cutoff Angle 2,5%	Intensity Ratio in 120° Cone	Intensity Ratio in 90° Cone
10°	18.8°	24.3°	98.0%	96.5%

# Beam Intensities from 1-20m

m	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
ft	3.3	6.6	9.8	13.1	16.4	19.7	23	26.2	29.5	32.8	36.1	39.4	42.7	45.9	49.2	52.5	55.8	59.1	62.3	65.6
lx	10698	2675	1189	669	428	297	218	167	132	107	88	74	63	55	48	42	37	33	30	27
fcd	993.9	248.5	110.4	62.1	39.8	27.6	20.3	15.5	12.3	9.9	8.2	6.9	5.9	5.1	4.4	3.9	3.4	3.1	2.8	2.5