



Light efficiency:


19 Lumen/Watt

Light quality:

CRI: 0.0

Color temperature:

0 K

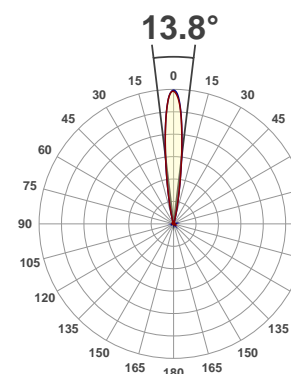

Product name:

7PZ IP

Test:


Zoom 50% Full On

Date:


4/21/2017

Output: 2305 lm Power consumption: 124 W Peak: 31809 cd


Spectral distribution

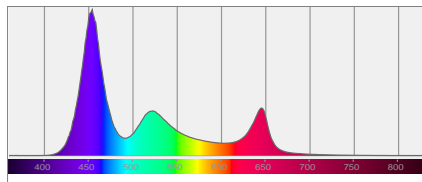

Color coordinates



Zoom color point




CRI R values



Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color divition from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
0 K	0.0	0.0	0.0	0.0	0.0	0.229	0.209	0.181	0.248	n/a

Beam details

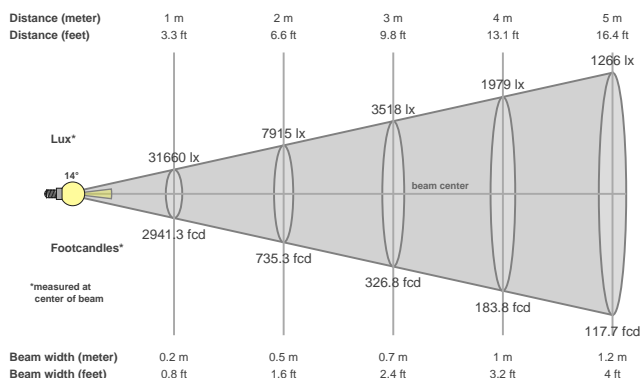

Beam angles

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%
13.8°	24.9°	33.7°

Beam intensities

Peak intensity	Int. ratio in 120° cone	Int. ratio in 90° cone
31809 cd	1.0%	1.0%

Power

Power	Power factor	Power frequency
124 W	0.97	60 Hz

Nominal voltage	Voltage	Current
230 V	117 V	1.09 A

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
31660lx	7915lx	3518lx	1979lx	1266lx	879lx	646lx	495lx	391lx	317lx	262lx	220lx	187lx	162lx	141lx	124lx	110lx	98lx	88lx	79lx
2941.3fcd	735.3fcd	326.8fcd	183.8fcd	117.7fcd	81.7fcd	60fcd	46fcd	36.3fcd	29.4fcd	24.3fcd	20.4fcd	17.4fcd	15fcd	13.1fcd	11.5fcd	10.2fcd	9.1fcd	8.1fcd	7.4fcd