

CODE	Length	REVISION			
AC3PM5PFM	0.203mt. (0.67 ft.)	REV	DESCRIPTION	DATE	SIGNATURE
			DMX CABLE	2019.6.10	


**PREFAB 3 PIN MALE TO 5 PIN FEMALE TURNAROUND:**




**CABLE CONSTRUCTION:**



DMX601 is a professional AES/EBU digital cable  
2\*0.336mm² with a very thick flexible PVC covered  
overall jacket - OFC (Oxygen Free Copper)  
Conductor drains mm: OFC tinned 19x0.15  
Conductor insulation: LPE red+blue, 1.8mm  
Nominal Impedance: 110ohm  
Conductor resistance: <80 ohm/Km  
1st Shield:2 cores twisted to a pair tinned copper  
braided shield 100 % coverage  
2nd shield:-  
Shield resistance: 30ohm/km  
Capacity inner conductor:47 pf/m  
Working Temperature min/Max: -20°C/+70°C

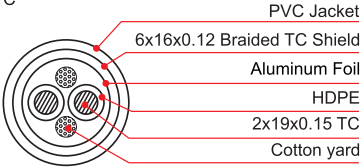

**WIRING METHOD:**

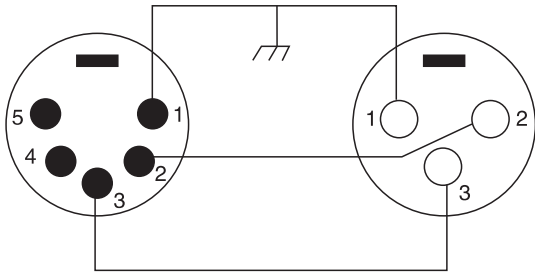

**PRINT ON CABLE:**