

American DJ® USER INSTRUCTIONS

SC-8FC SYSTEM



8 CHANNEL LOW VOLTAGE SWITCH SYSTEM

MAIN FEATURES:

- INDIVIDUAL CHANNEL SWITCHES & FLASH ON BUTTONS. MASTER ON/OFF.
- LIGHTED SWITCHES
- 19" RACK MOUNT SWITCH CENTER WITH BUILT-IN POWER SUPPLY.
- 15 AMPS TOTAL POWER CAPACITY (PER RELAY PACK).
- SYSTEM INCLUDES: 1 - SC-8FC, 1 - SC-RP8, 1 - SC-EX25
- MAY LINK UP TO 2 RP-8 RELAY PACKS ON 1 SC-8FC.
- INCLUDES SWITCH FOR CC-2016 & OUTPUT TO OPTIONAL CC-2016 CHASE CONTROLLER (SOLD SEPERATELY).
- 12V SIGNAL OUTPUT FROM SWITCH CENTER.

CONTROLS AND COMPONENTS:

1. MASTER ON/OFF SWITCH.
2. INDIVIDUAL CHANNEL SWITCHES.
3. CONTROL SWITCH FOR CC-2016, FEATURES "ALL ON", "BLACKOUT", & "ALL OFF" (only operational when using the CC-2016™ chase controller).
4. FLASH ON BUTTON FOR EACH INDIVIDUAL CHANNEL.
5. 1/4" STEREO OUTPUT TO CC-2016.
6. 9 PIN LINE OUT CONNECTOR.
7. 12V POWER SUPPLY INPUT CONNECTOR.
8. FUSE

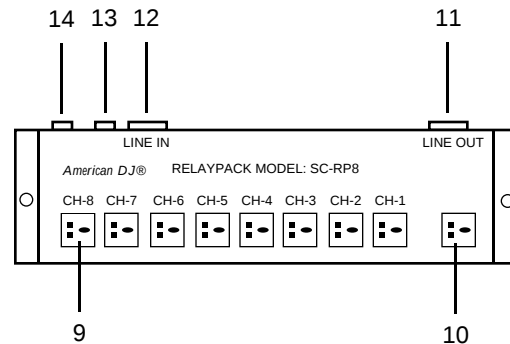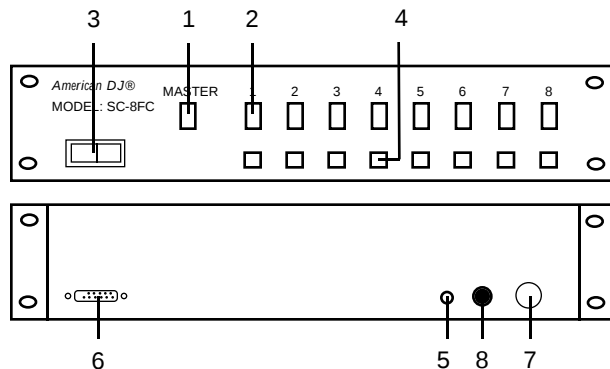

9. CHANNEL 1-8 110V SWITCHED SOCKETS.
10. UNSWITCHED 110V SOCKET FOR CONSTANT ON ITEM OR LINKING AC TO ANOTHER RELAY PACK.
11. 9 PIN LINE OUTPUT FOR LINKING PACKS.
12. 9 PIN LINE INPUT FROM SC-8FC OR FROM ANOTHER SC-RP8.
13. 15 AMP CIRCUIT BREAKER.
14. A/C CORD AND PLUG.

Specifications: Model - SC-8FC SYSTEM

Maximum load: 15 amps or 1800 watts per relay pack (using separate circuit for each).

Size: SC-8FC - 19" x 2" x 2"

SC-RP8 - 19" x 5" x 2"

System weight: 13lbs.

SAMPLE SYSTEM:

