



Light efficiency:


16 Lumen/Watt

Light quality:

CRI: 86.6

Color temperature:

17849 K

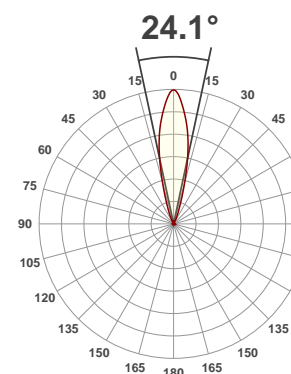

Product name:

12PX Hex

Test:


Full On No UV

Date:


11/6/2017

Output: 1773 lm Power consumption: 108 W Peak: 9008 cd


Spectral distribution

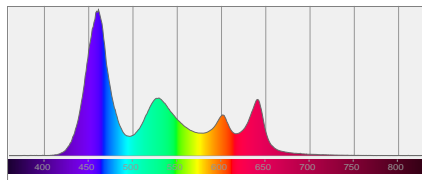


Color coordinates



Zoom color point




CRI R values

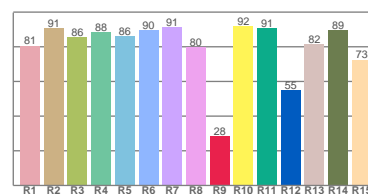

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color divition from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
17849 K	86.6	28.3	80.6	99.8	88.5	0.263	0.257	0.189	0.277	0.0080

Beam details

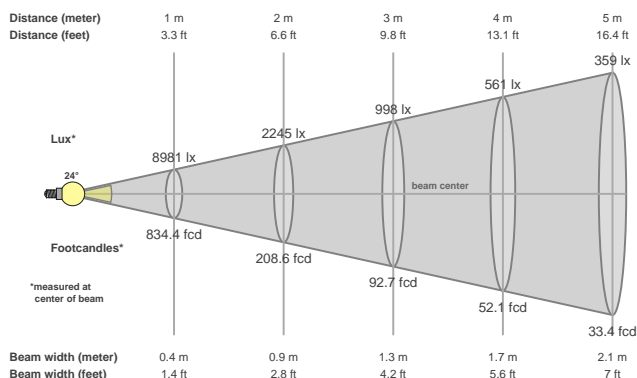

Beam angels

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%
24.1°	42.3°	56°

Beam intensities

Peak intensity	Int. ratio in 120° cone	Int. ratio in 90° cone
9008 cd	98.4%	97.6%

Power

Power	Power factor	Power frequency
108 W	0.99	60.1 Hz

Nominal voltage	Voltage	Current
230 V	116 V	0.942 A

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
8981lx	2245lx	998lx	561lx	359lx	249lx	183lx	140lx	111lx	90lx	74lx	62lx	53lx	46lx	40lx	35lx	31lx	28lx	25lx	22lx
834.4fcd	208.6fcd	92.7fcd	52.1fcd	33.4fcd	23.2fcd	17fcd	13fcd	10.3fcd	8.3fcd	6.9fcd	5.8fcd	4.9fcd	4.3fcd	3.7fcd	3.3fcd	2.9fcd	2.6fcd	2.3fcd	2.1fcd