



Light efficiency:


30 Lumen/Watt

Light quality:

CRI: 65.0

Color temperature:

14384 K

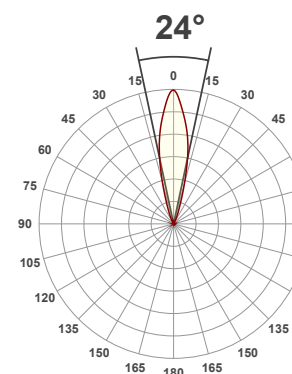

Product name:

5P Hex

Test:


Full On No UV

Date:


11/3/2017

Output: 1176 lm Power consumption: 39.6 W Peak: 6072 cd


Spectral distribution

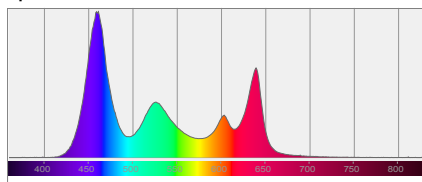


Color coordinates



Zoom color point




CRI R values

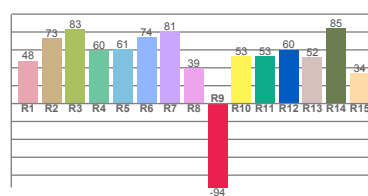

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color diviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
14384 K	65.0	-93.8	72.0	108.4	84.6	0.279	0.252	0.204	0.276	0.0223

Beam details

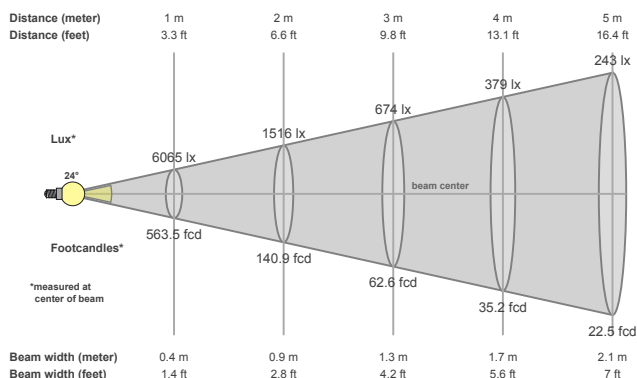

Beam angles

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%
24°	42.3°	55.9°

Beam intensities

Peak intensity	Int. ratio in 120° cone	Int. ratio in 90° cone
6072 cd	98.0%	97.5%

Power

Power	Power factor	Power frequency
39.6 W	0.61	60 Hz

Nominal voltage	Voltage	Current
230 V	116 V	0.565 A

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
6065lx	1516lx	674lx	379lx	243lx	168lx	124lx	95lx	75lx	61lx	50lx	42lx	36lx	31lx	27lx	24lx	21lx	19lx	17lx	15lx
563.5fcd	140.9fcd	62.6fcd	35.2fcd	22.5fcd	15.7fcd	11.5fcd	8.8fcd	7fcd	5.6fcd	4.7fcd	3.9fcd	3.3fcd	2.9fcd	2.5fcd	2.2fcd	1.9fcd	1.7fcd	1.6fcd	1.4fcd