



WIFI NET 2

Two Port Wireless Node with
Built-in 2.4G WIFI

FEATURES:

- ArtNet / sACN / DMX, 2 Port Node
- 2.4G Wifi
- Line Voltage or PoE powered
- DHCP or Static IP Address
- Configurable from unit menu or web browser

PROTOCOLS:

- DMX512
- RDM
- Artnet
- sACN

PHYSICAL:

- M10 Thread for clamp / rigging
- Safety eyelet
- 1x Indoor RJ45 Input
- 2x 5-pin XLR Input / Output

DIMENSIONS / WEIGHT:

- Length: 3.48" (88.50mm)
- Width: 5.06" (128.55mm)
- Height: 2.46" (62.5mm)
- Weight: 1.23lbs. (0.56kg)



POWER:

- 9VDC and POE
- PoE 802.3af
- AC Power: DC9V-12V 300mA min.
- PoE Power: TBA
- Power Consumption: 2W @ 120V and 2W @ 230V

THERMAL:




- Ambient Operational Temperature: -4°F to 113°F (-20°C to 45°C)
- Humidity: <75%
- Storage Temperature: 77°F (25°C)

APPROVALS / RATINGS:


- CE
- cETLus (Pending)
- FCC
- IP20-Rated

INCLUDED ACCESSORIES:

- 9V Power Supply

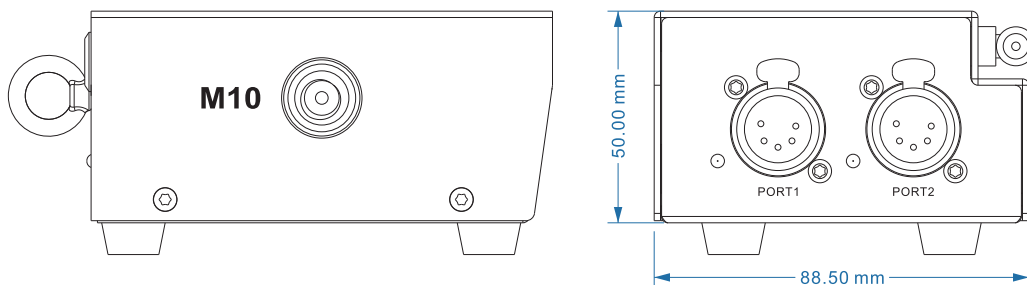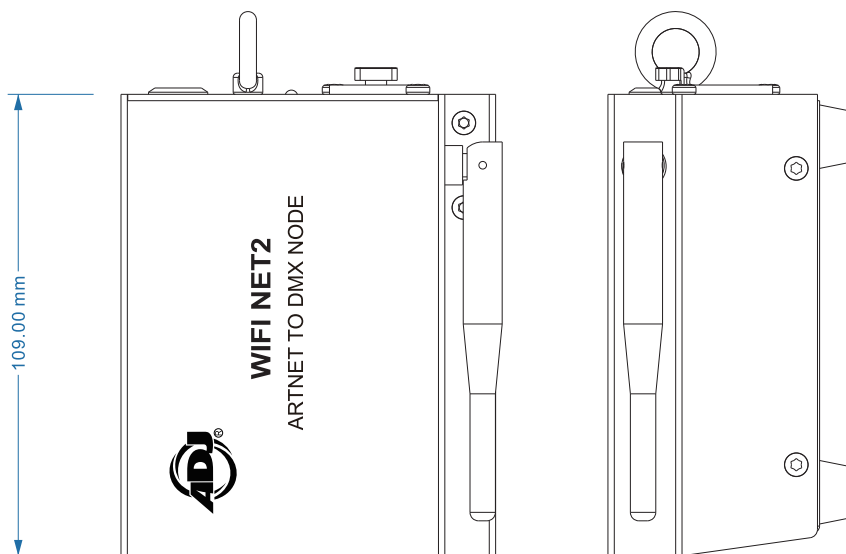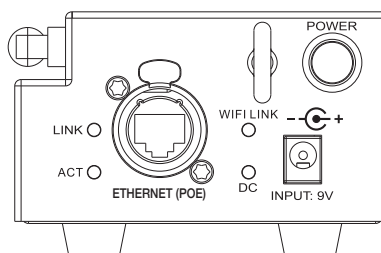

INSTALLATION:

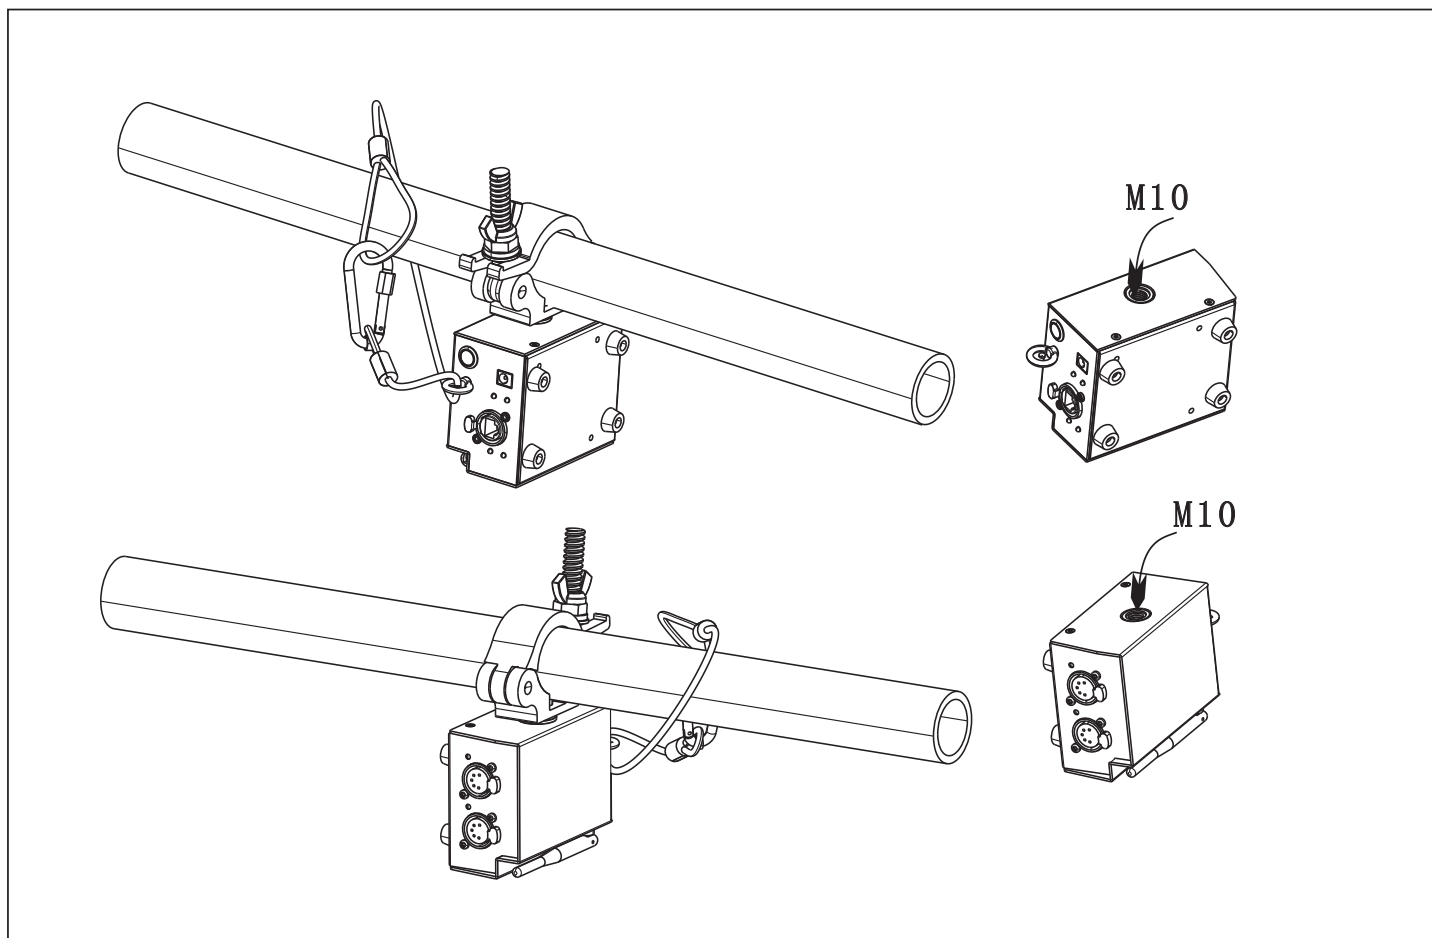

WiFi NET 2 seamlessly integrates with any standard data source commonly used in the professional lighting industry, including Art-Net or sACN, from a computer, iPad, tablet, or a DMX lighting console. By effortlessly converting and decoding all Art-Net and sACN signals, WiFi NET 2 ensures compatibility and versatility, delivering DMX 512 signals through two dedicated DMX outputs.

With support for Unicast, broadcast, fixed IP, and DHCP configuration on UDP, WiFi NET 2 offers flexible networking options to suit your specific setup requirements. Configuration is made simple and convenient via any web browser, allowing for quick and easy customization to optimize your lighting control experience.