

Focus Flex L19



Light Efficiency:



Light Quality:



Color Temperature:



Output: 4882 lm

Peak: 71885 cd


Power: 320 W

PF: 1.0



Beam Angle

16.5°

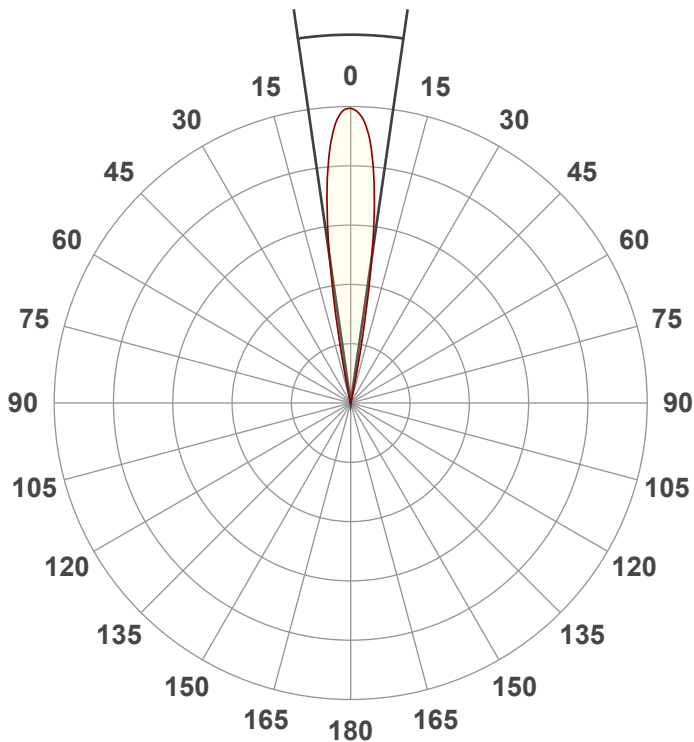

Test:

CRI Zoom 16

Date:

10/26/2022

Note:

R @ 224

G @ 0

B @ 0


L @ 255



CIE 1931
x: 0.476
y: 0.455

Spectra



Dominant Wavelength: 580nm

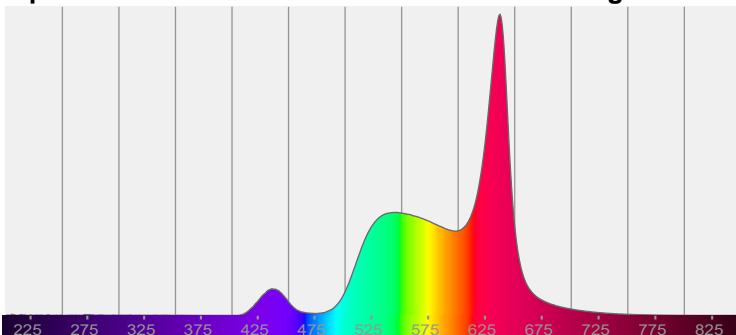


Power

Voltage: 116 V
Current: 2.77 A
Frequency: 0 Hz


Color Details

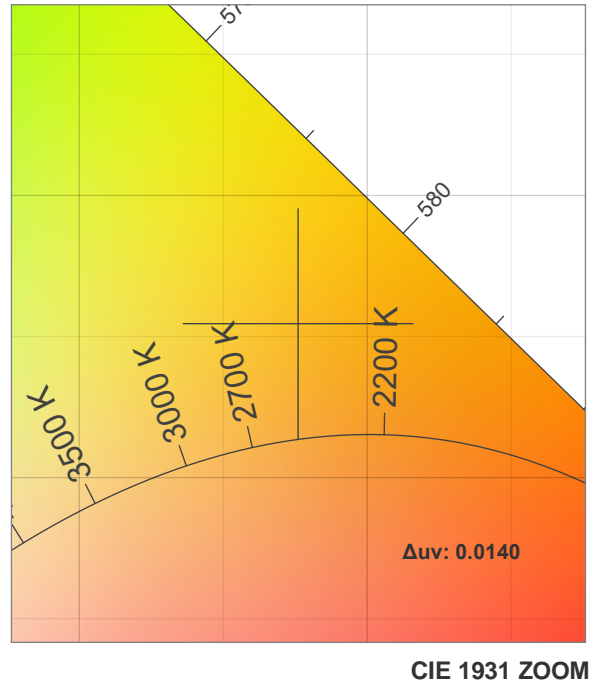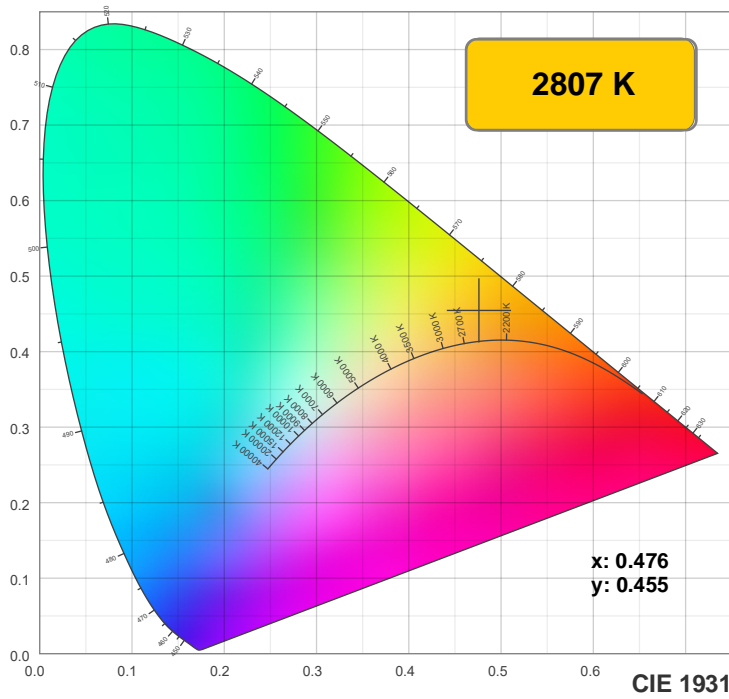

TM30: 84.7

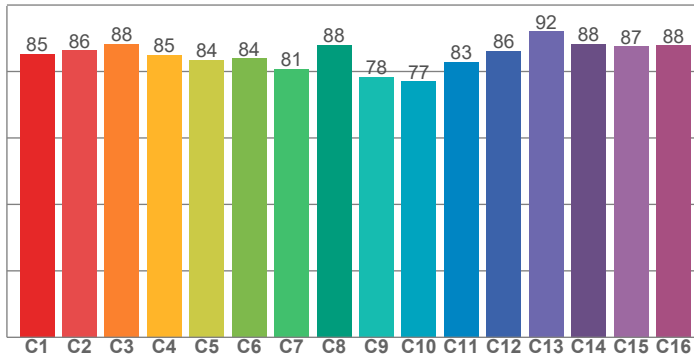

CRI: 84.2 (R1-R8)

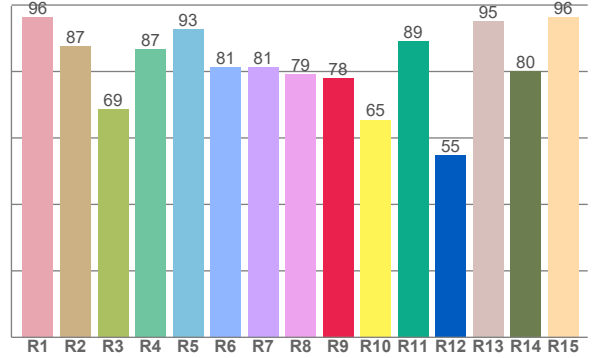

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
96.3	87.5	68.7	86.7	92.7	81.3	81.3	79.2	78.1	65.5	89.1	54.7	95.2	80.0	96.3


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
85.3	86.4	88.3	85.0	83.5	83.9	80.8	88.0	78.3	76.9	82.9	86.1	92.1	88.3	87.5	87.8

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
93.0	95.6	76.1	72.9	72.2	74.5	94.6	79.6	65.1	51.6	48.8	57.7	68.0	81.1	88.5


CQS: 70.6

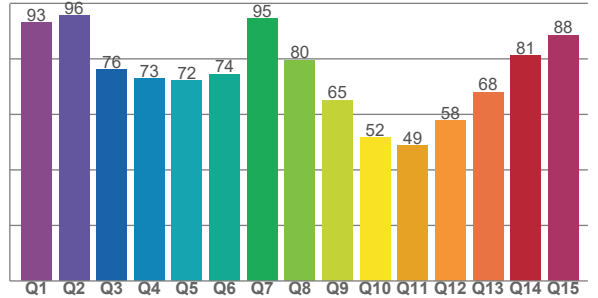

Color Parameters

Color Temperature	Color Rendering Index	Red Component	Color Fidelity	Color Gamut	Color Quality Scale	Color Coordinate CIE 1931	Color Coordinate CIE 1931	Color Coordinate	Color Coordinate	Color Deviation from Black Body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
2807 K	84.2	78.1	84.7	99.8	70.6	0.476	0.455	0.254	0.364	0.0140

Beam Details

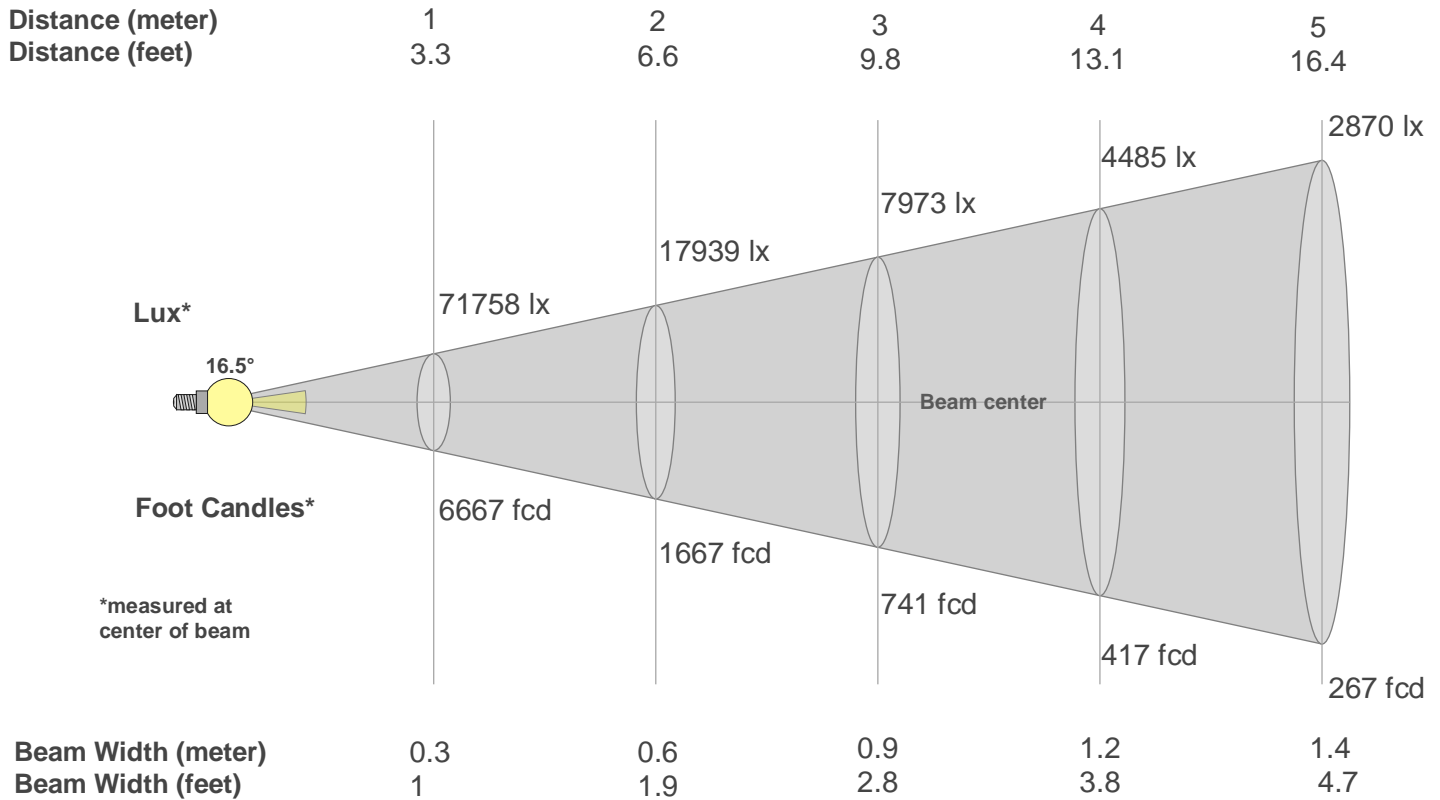

Beam Intensities from 1-20m

m	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
ft	3.3	6.6	9.8	13.1	16.4	19.7	23	26.2	29.5	32.8	36.1	39.4	42.7	45.9	49.2	52.5	55.8	59.1	62.3	65.6
lx	71758	17939	7973	4485	2870	1993	1464	1121	886	718	593	498	425	366	319	280	248	221	199	179
fcd	6666.5	1666.6	740.7	416.7	266.7	185.2	136.1	104.2	82.3	66.7	55.1	46.3	39.4	34	29.6	26	23.1	20.6	18.5	16.7

Intensities in 0° C-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
71.8K	71.5K	70.5K	68.4K	64.9K	60.4K	54.4K	46.8K	38.2K	28.3K	18.7K	10.1K	4.1K	1.4K	0.2K	0.0K	0.0K	0.0K	0.0K	0.0K
100%	100%	98%	95%	90%	84%	76%	65%	53%	39%	26%	14%	6%	2%	0%	0%	0%	0%	0%	0%

Intensities in 90° C-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
71.8K	71.5K	70.5K	68.4K	64.9K	60.4K	54.4K	46.8K	38.2K	28.3K	18.7K	10.1K	4.1K	1.4K	0.2K	0.0K	0.0K	0.0K	0.0K	0.0K
100%	100%	98%	95%	90%	84%	76%	65%	53%	39%	26%	14%	6%	2%	0%	0%	0%	0%	0%	0%

Intensities in 180° C-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
71.8K	71.3K	69.9K	68.0K	64.8K	60.0K	54.2K	46.9K	38.1K	28.5K	18.4K	10.3K	4.1K	1.1K	0.2K	0.0K	0.0K	0.0K	0.0K	0.0K
100%	99%	97%	95%	90%	84%	76%	65%	53%	40%	26%	14%	6%	2%	0%	0%	0%	0%	0%	0%

Intensities in 270° C-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
71.8K	71.3K	69.9K	68.0K	64.8K	60.0K	54.2K	46.9K	38.1K	28.5K	18.4K	10.3K	4.1K	1.1K	0.2K	0.0K	0.0K	0.0K	0.0K	0.0K
100%	99%	97%	95%	90%	84%	76%	65%	53%	40%	26%	14%	6%	2%	0%	0%	0%	0%	0%	0%

Beam Angle 50%	Field Angle 10%	Cutoff Angle 2,5%	Intensity Ratio in 120° Cone	Intensity Ratio in 90° Cone
16.5°	22.9°	25.6°	100.0%	100.0%