

Light efficiency:

43 Lumen/Watt

Light quality:

CRI: 98.0

Color temperature:

3164 K

Output: 13130 lm

Peak: 81997 cd

Power: 304 W

PF: 1.0




Product name:

PAR Z300 3K (Zoom 25°, Full On)

Item number:


Date and time:

8/16/2025 12:03:07 PM

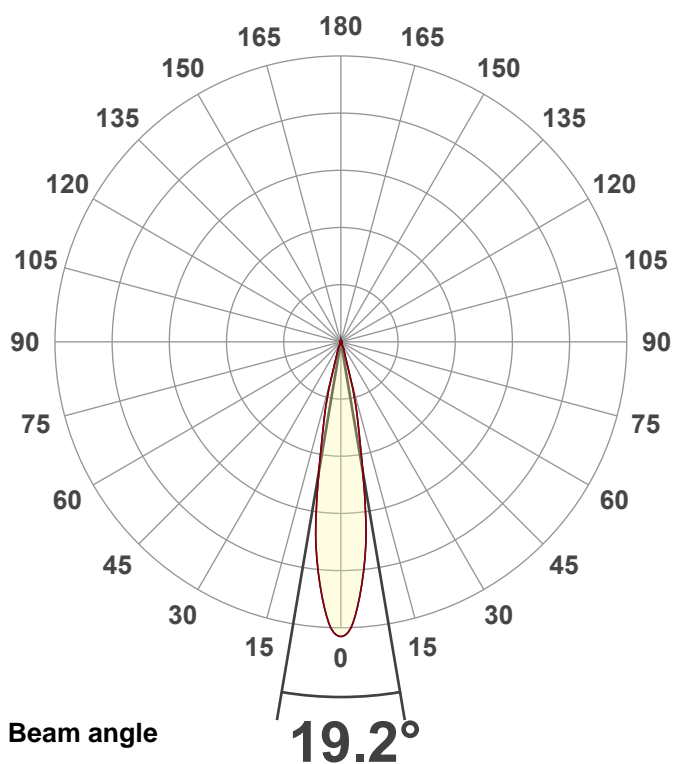

CIE 1931
x: 0.426
y: 0.399



Spectra

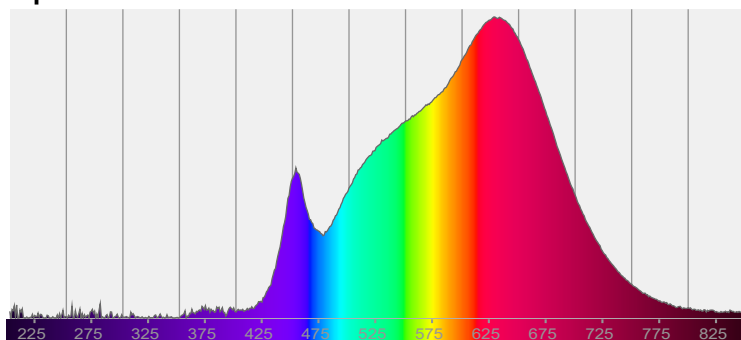


Power

Voltage: 117 V
Current: 2.60 A
Frequency: 0 Hz


Color details

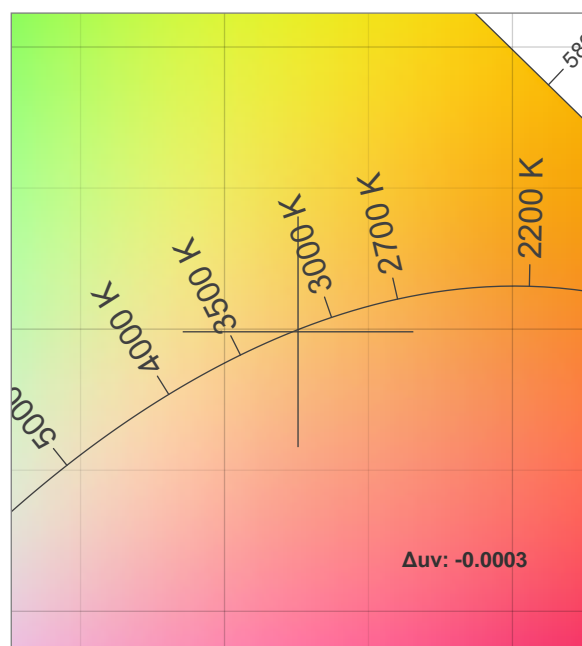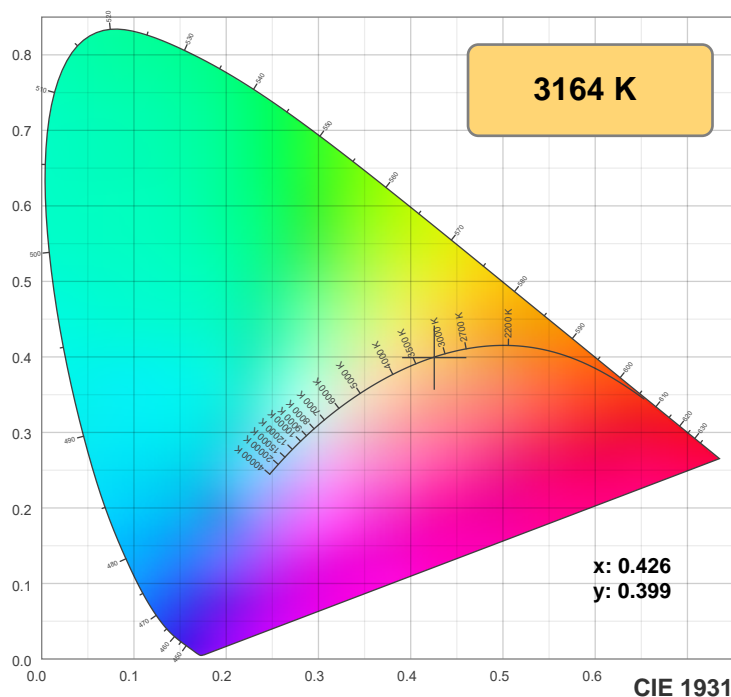

TM-30: 95.6

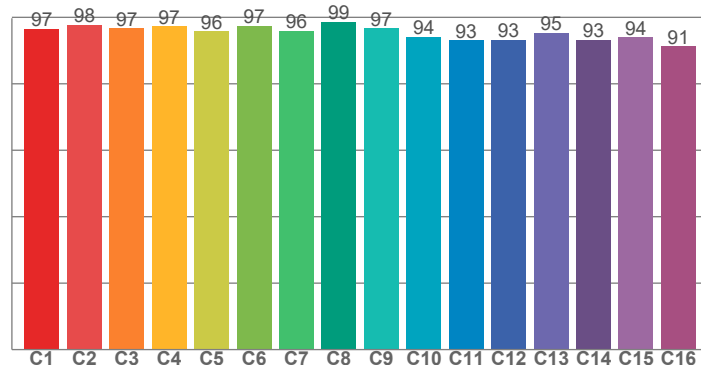

CRI: 98.0 (R1-R8)

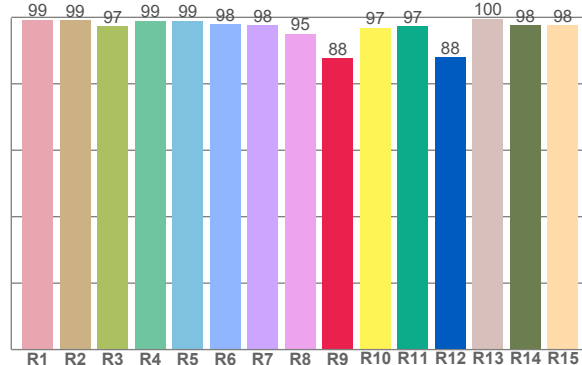

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
99.3	99.2	97.2	99.0	99.0	97.9	97.6	95.1	87.7	96.9	97.3	88.0	99.6	97.6	97.6


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
96.5	97.8	96.7	97.2	95.8	97.5	96.0	98.7	96.7	94.2	93.2	93.3	95.4	93.2	94.0	91.2

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
94.7	97.3	93.0	94.1	96.9	96.8	95.6	97.1	97.9	96.9	97.5	97.9	97.9	95.3	95.1

CQS: 95.8

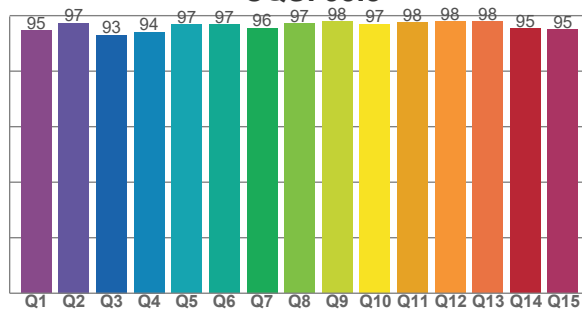

Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
3164 K	98.0	87.7	95.6	100.8	95.8	0.426	0.399	0.245	0.345	-0.0003

TM-30 details







Rf 95.6

Fidelity index Rf


Rg 100.8

Gamut index Rg

Hue Bin	Ri	Shifts (%)	
		Chroma	Hue
1	97	-1%	0%
2	98	-1%	0%
3	97	0%	1%
4	97	-1%	0%
5	96	-2%	1%
6	97	1%	1%
7	96	-1%	1%
8	99	0%	0%
9	97	0%	2%
10	94	0%	3%
11	93	2%	4%
12	93	4%	0%
13	95	2%	-3%
14	93	3%	-4%
15	94	0%	-3%
16	91	1%	-7%

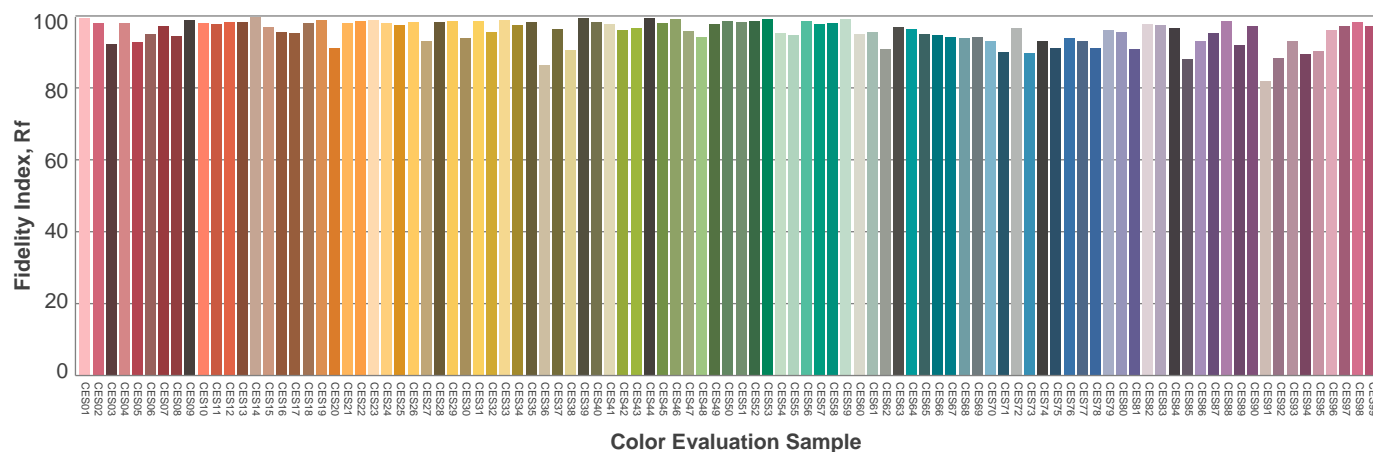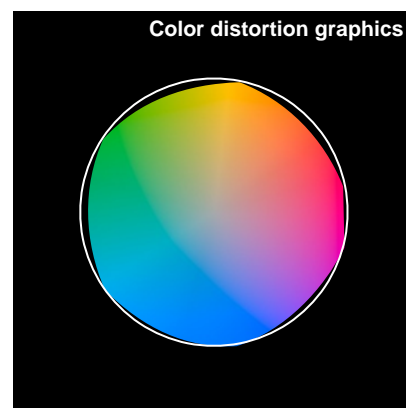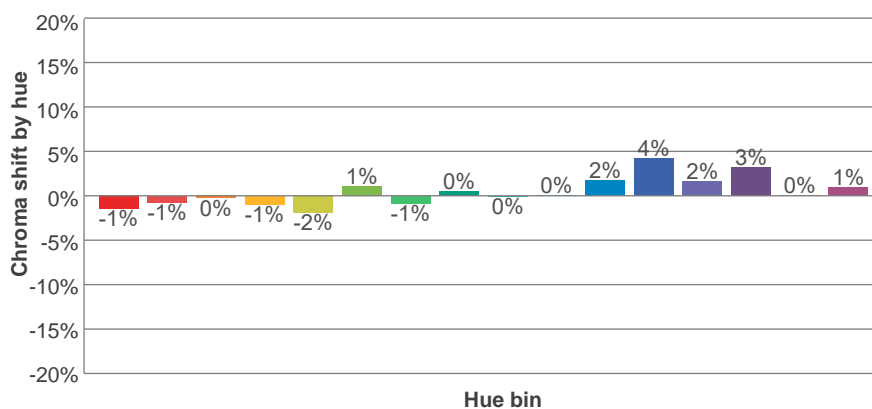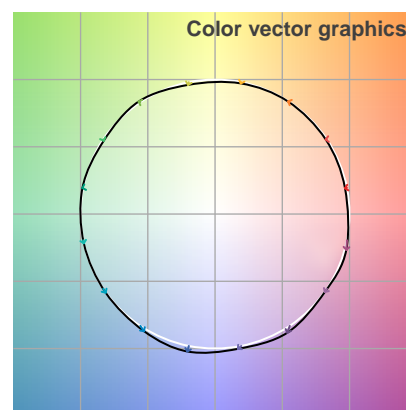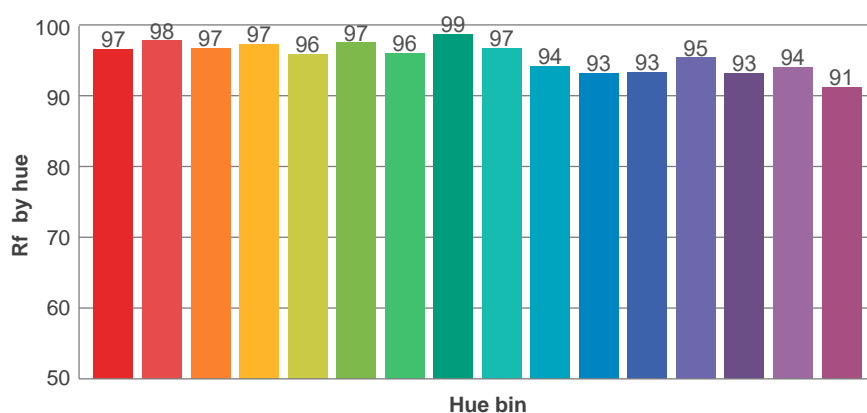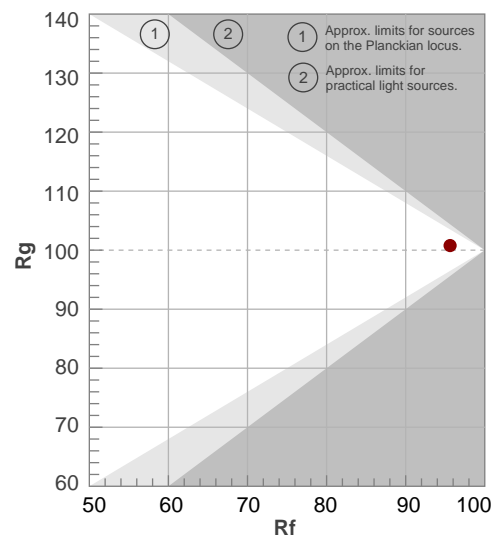

Beam details

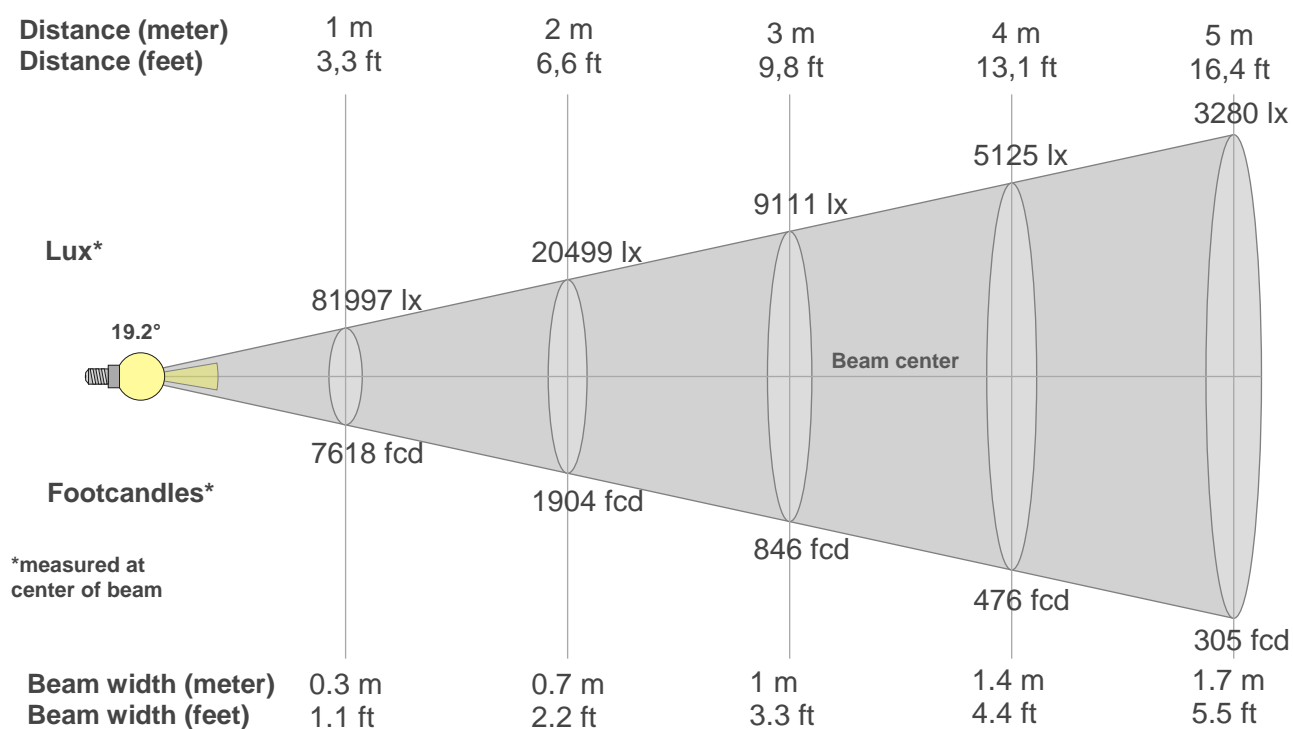

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
81997lx	20499lx	9111lx	5125lx	3280lx	2278lx	1673lx	1281lx	1012lx	820lx	678lx	569lx	485lx	418lx	364lx	320lx	284lx	253lx	227lx	205lx
7617.8fcd	1904.4fcd	846.4fcd	476.1fcd	304.7fcd	211.6fcd	155.5fcd	119fcd	94fcd	76.2fcd	63fcd	52.9fcd	45.1fcd	38.9fcd	33.9fcd	29.8fcd	26.4fcd	23.5fcd	21.1fcd	19fcd

Intensities in 0° c-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
82.0k	82.0k	82.0k	78.1k	73.3k	68.4k	63.5k	58.7k	52.1k	45.1k	38.2k	31.2k	24.2k	19.8k	16.2k	12.5k	8.8k	5.1k	3.7k	3.0k
100%	100%	100%	95%	89%	83%	77%	72%	64%	55%	47%	38%	30%	24%	20%	15%	11%	6%	5%	4%

Intensities in 90° c-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
82.0k	82.0k	82.0k	78.1k	73.3k	68.4k	63.5k	58.7k	52.1k	45.1k	38.2k	31.2k	24.2k	19.8k	16.2k	12.5k	8.8k	5.1k	3.7k	3.0k
100%	100%	100%	95%	89%	83%	77%	72%	64%	55%	47%	38%	30%	24%	20%	15%	11%	6%	5%	4%

Intensities in 180° c-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
82.0k	82.0k	82.0k	78.1k	73.3k	68.4k	63.5k	58.7k	52.1k	45.1k	38.2k	31.2k	24.2k	19.8k	16.2k	12.5k	8.8k	5.1k	3.7k	3.0k
100%	100%	100%	95%	89%	83%	77%	72%	64%	55%	47%	38%	30%	24%	20%	15%	11%	6%	5%	4%

Intensities in 270° c-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
82.0k	82.0k	82.0k	78.1k	73.3k	68.4k	63.5k	58.7k	52.1k	45.1k	38.2k	31.2k	24.2k	19.8k	16.2k	12.5k	8.8k	5.1k	3.7k	3.0k
100%	100%	100%	95%	89%	83%	77%	72%	64%	55%	47%	38%	30%	24%	20%	15%	11%	6%	5%	4%


Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
19.2°	32.3°	40.6°	77.2%	73.7%




Flicker curve (complete sampled flicker signal)



Flicker frame (frame of one flicker period)

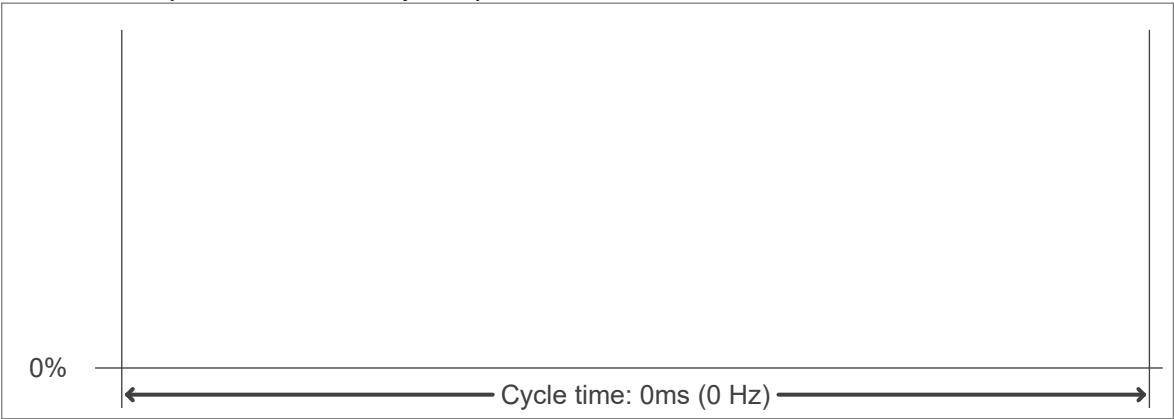

Flicker FFT (frequency scope of flicker curve)

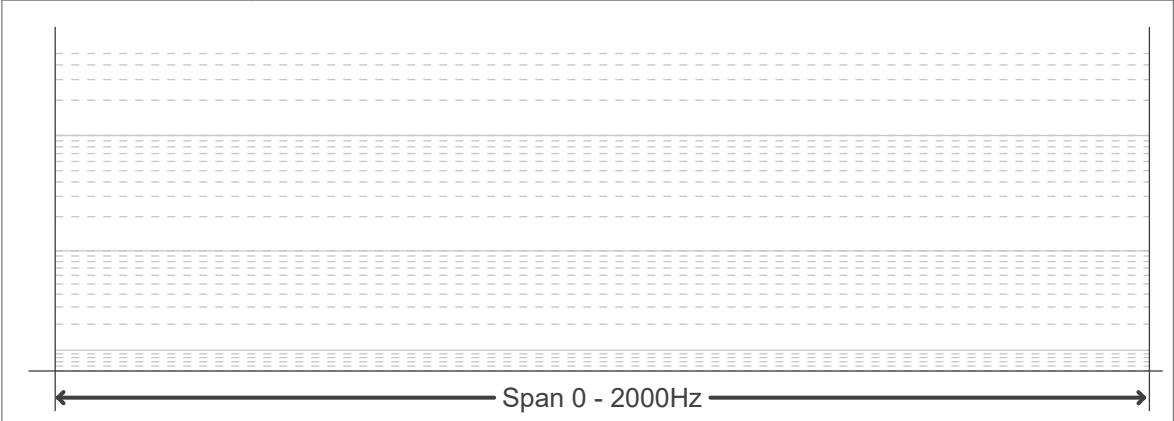

Flicker results:

Flicker frequency:		n/a Hz	
Flicker index:	n/a	JA8/10 40Hz	n/a %
Flicker percentage:	n/a %	JA8/10 90Hz	n/a %
SVM: (Visual flicker)	n/a	JA8/10 200Hz	n/a %
PstLM	n/a	JA8/10 400Hz	n/a %
Mp	n/a	JA8/10 1000Hz	n/a %

Flicker conditions:

Sample rate:	n/a samples/second
--------------	--------------------