

#### Light efficiency:

**43 Lumen/Watt**

#### Light quality:

**CRI: 98.0**

#### Color temperature:

**3161 K**

**Output: 13073 lm**

**Peak: 61851 cd**

**Power: 304 W**

**PF: 1.0**




**Product name:**

**PAR Z300 3K (Zoom 30°, Full On)**

**Item number:**


**Date and time:**

**8/16/2025 12:08:12 PM**

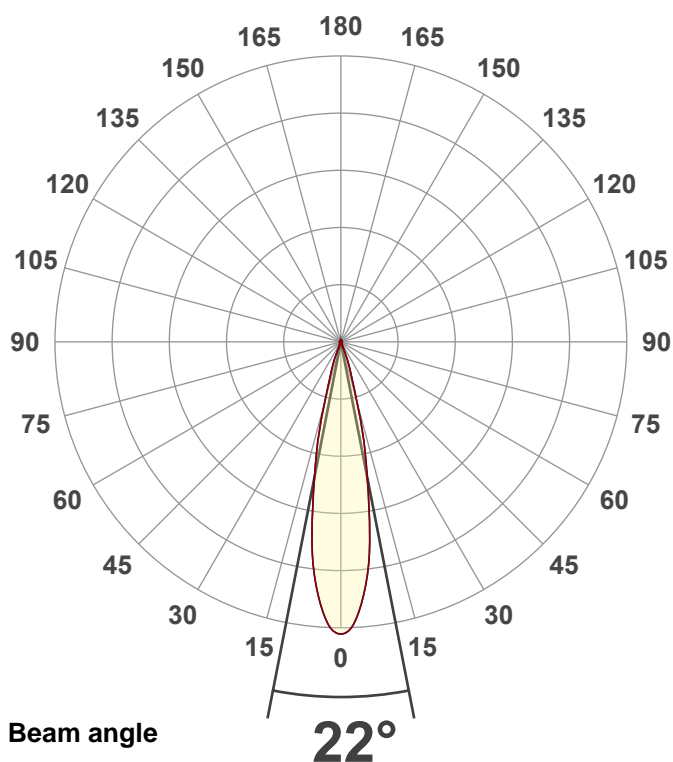

**CIE 1931**  
**x: 0.426**  
**y: 0.400**



#### Spectra

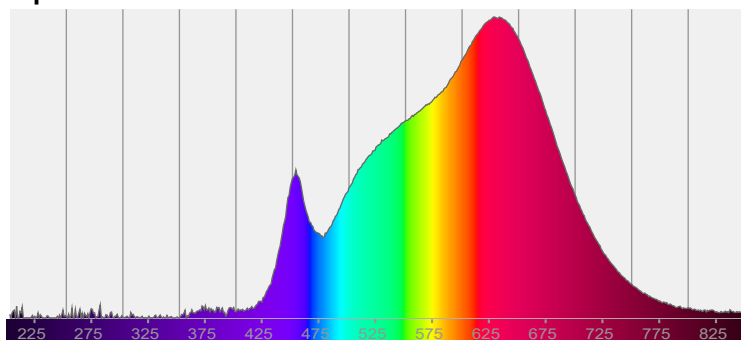


#### Power

**Voltage: 117 V**  
**Current: 2.60 A**  
**Frequency: 0 Hz**


## Color details

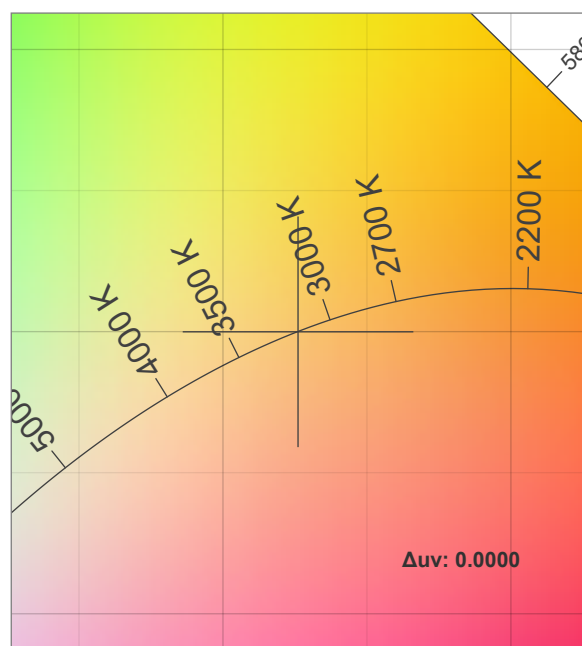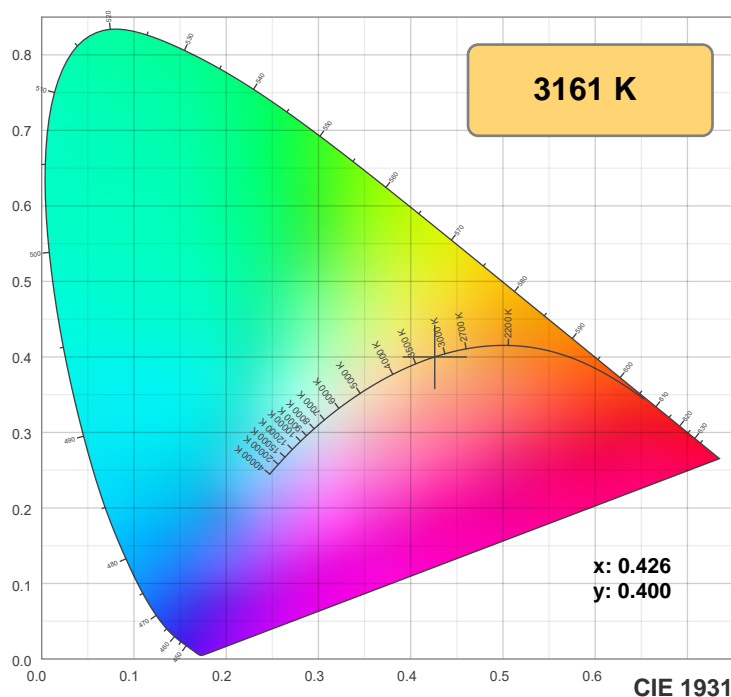

### TM-30: 95.7

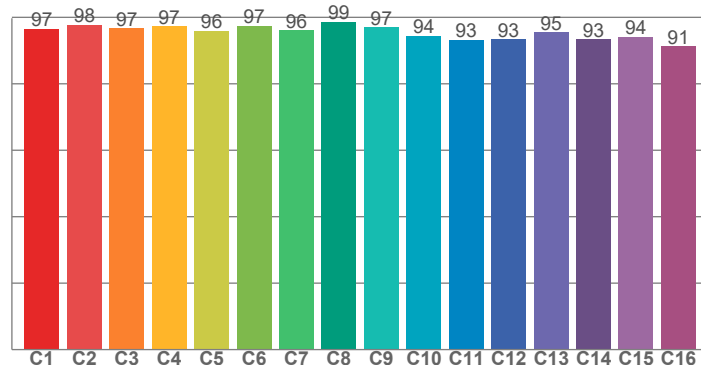

### CRI: 98.0 (R1-R8)

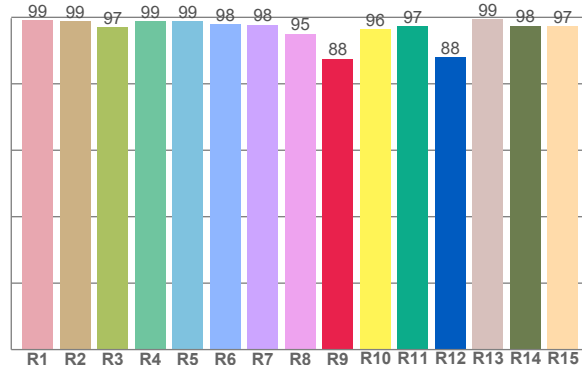

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
99.2	99.0	97.0	98.9	98.9	98.0	97.8	95.1	87.6	96.4	97.3	88.1	99.4	97.5	97.4


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
96.6	97.8	96.6	97.3	95.9	97.4	96.2	98.6	97.0	94.4	93.3	93.4	95.5	93.3	94.2	91.3

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
94.7	97.3	93.1	94.2	97.0	96.6	95.6	97.2	97.8	96.9	97.6	98.0	98.0	95.3	95.1

### CQS: 95.9

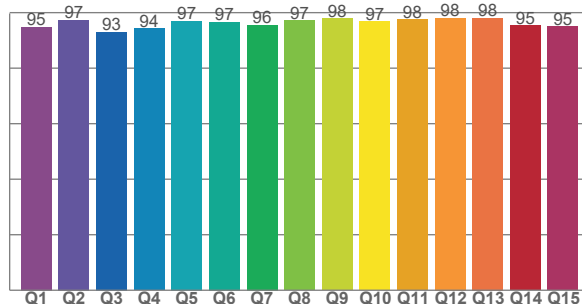





## Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
3161 K	98.0	87.6	95.7	100.8	95.9	0.426	0.400	0.245	0.345	0.0000


Fidelity index  $R_f$

## Gamut index Rg

		Shifts (%)	
Hue Bin	$R_i$	Chroma	Hue
1	97	-1%	0%
2	98	-1%	0%
3	97	0%	1%
4	97	-1%	0%
5	96	-2%	1%
6	97	1%	1%
7	96	-1%	0%
8	99	1%	0%
9	97	0%	2%
10	94	0%	3%
11	93	2%	4%
12	93	4%	0%
13	95	2%	-3%
14	93	3%	-4%
15	94	0%	-3%
16	91	1%	-7%

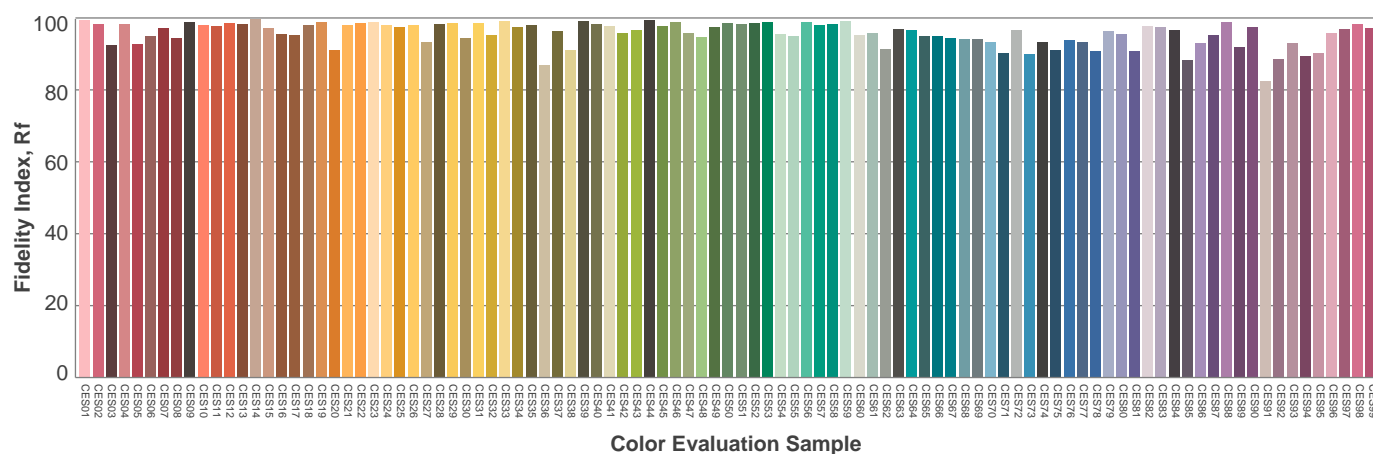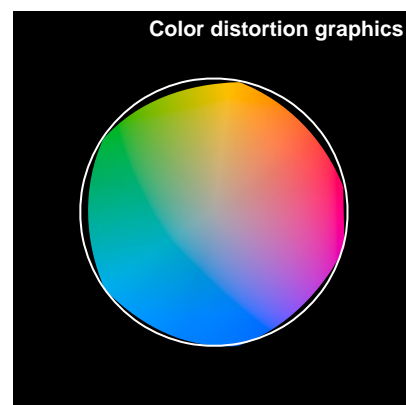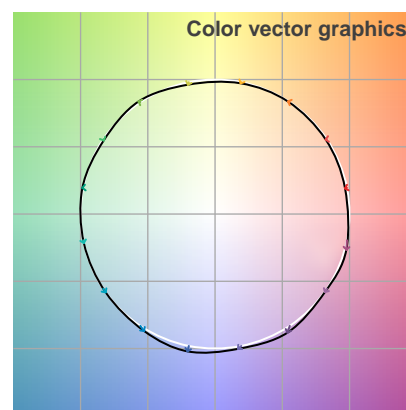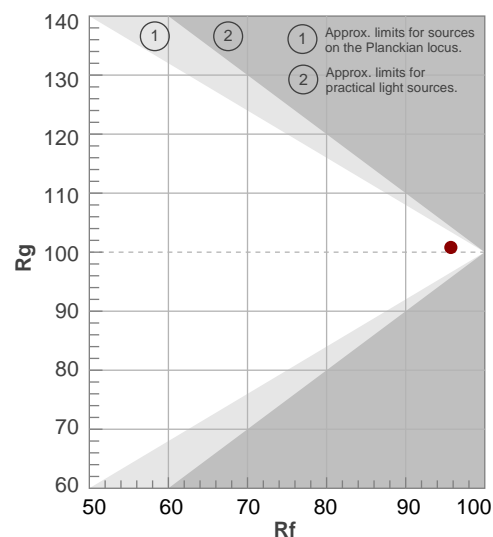

## Beam details

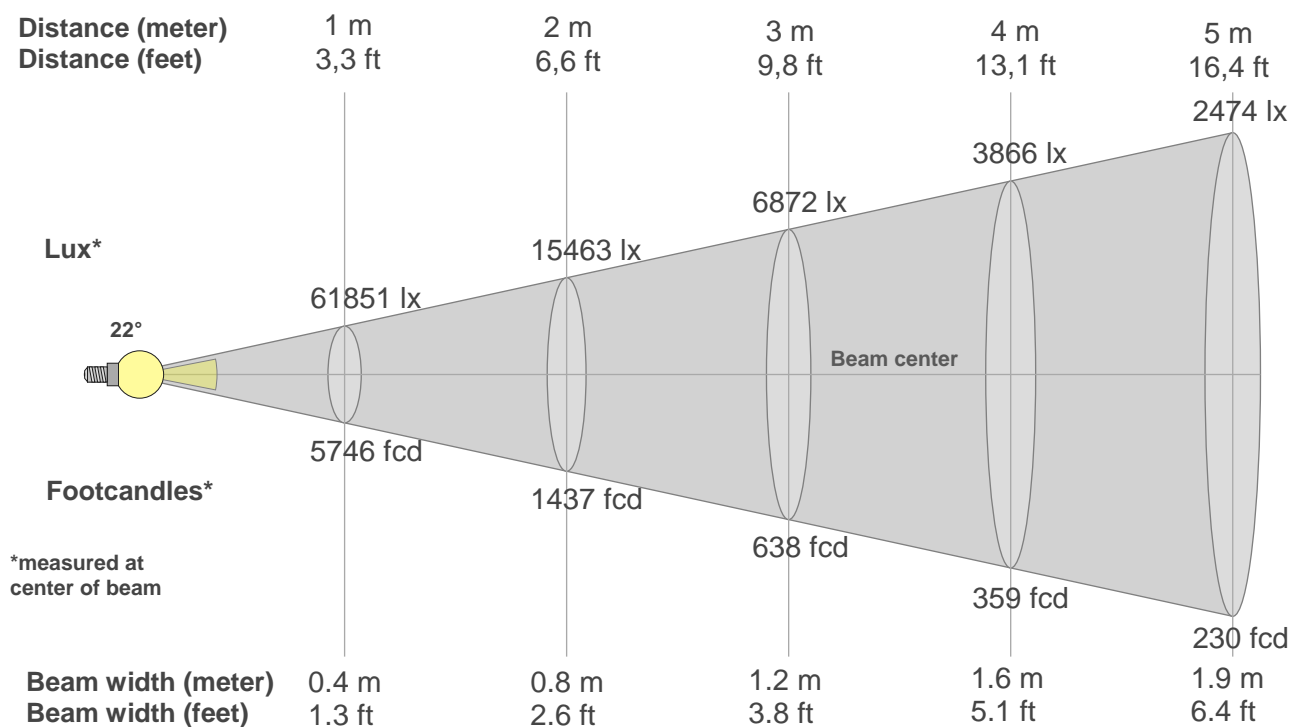

### Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
61851lx	15463lx	6872lx	3866lx	2474lx	1718lx	1262lx	966lx	764lx	619lx	511lx	430lx	366lx	316lx	275lx	242lx	214lx	191lx	171lx	155lx
5746.1fcd	1436.5fcd	638.5fcd	359.1fcd	229.8fcd	159.6fcd	117.3fcd	89.8fcd	70.9fcd	57.5fcd	47.5fcd	39.9fcd	34fcd	29.3fcd	25.5fcd	22.4fcd	19.9fcd	17.7fcd	15.9fcd	14.4fcd

### Intensities in 0° c-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
61.9k	61.9k	61.9k	60.1k	57.3k	54.5k	51.6k	48.8k	44.9k	40.3k	35.6k	31.0k	26.4k	22.5k	19.1k	15.6k	12.2k	8.7k	6.7k	5.4k
100%	100%	100%	97%	93%	88%	83%	79%	73%	65%	58%	50%	43%	36%	31%	25%	20%	14%	11%	9%

### Intensities in 90° c-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
61.9k	61.9k	61.9k	60.1k	57.3k	54.5k	51.6k	48.8k	44.9k	40.3k	35.6k	31.0k	26.4k	22.5k	19.1k	15.6k	12.2k	8.7k	6.7k	5.4k
100%	100%	100%	97%	93%	88%	83%	79%	73%	65%	58%	50%	43%	36%	31%	25%	20%	14%	11%	9%

### Intensities in 180° c-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
61.9k	61.9k	61.9k	60.1k	57.3k	54.5k	51.6k	48.8k	44.9k	40.3k	35.6k	31.0k	26.4k	22.5k	19.1k	15.6k	12.2k	8.7k	6.7k	5.4k
100%	100%	100%	97%	93%	88%	83%	79%	73%	65%	58%	50%	43%	36%	31%	25%	20%	14%	11%	9%

### Intensities in 270° c-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
61.9k	61.9k	61.9k	60.1k	57.3k	54.5k	51.6k	48.8k	44.9k	40.3k	35.6k	31.0k	26.4k	22.5k	19.1k	15.6k	12.2k	8.7k	6.7k	5.4k
100%	100%	100%	97%	93%	88%	83%	79%	73%	65%	58%	50%	43%	36%	31%	25%	20%	14%	11%	9%


Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
22°	36.8°	44.3°	77.1%	73.7%




Flicker curve (complete sampled flicker signal)



Flicker frame (frame of one flicker period)

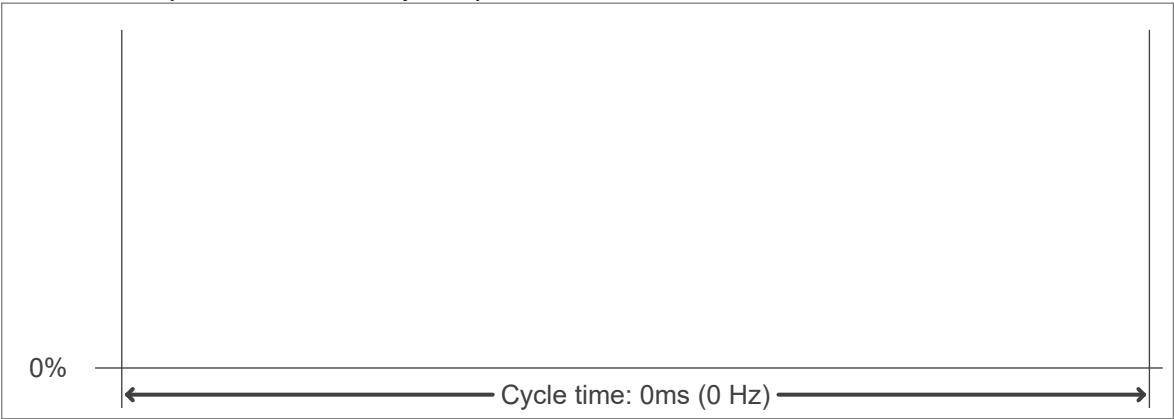

Flicker FFT (frequency scope of flicker curve)

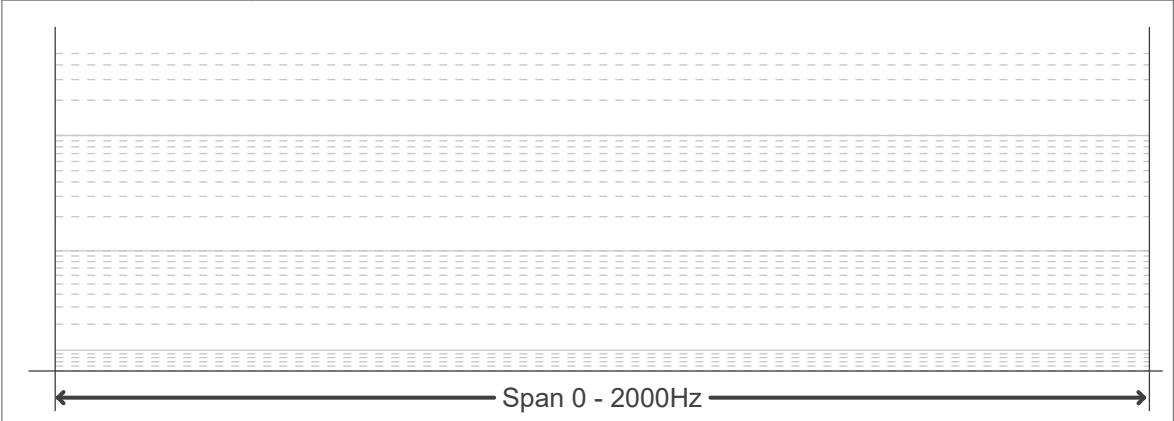

Flicker results:

Flicker frequency:		n/a Hz	
Flicker index:	n/a	JA8/10 40Hz	n/a %
Flicker percentage:	n/a %	JA8/10 90Hz	n/a %
SVM: (Visual flicker)	n/a	JA8/10 200Hz	n/a %
PstLM	n/a	JA8/10 400Hz	n/a %
Mp	n/a	JA8/10 1000Hz	n/a %

Flicker conditions:

Sample rate:	n/a samples/second
--------------	--------------------