

CODE	Length	REVISION			
		REV	DESCRIPTION	DATE	SIGNATURE
AC5PDMX50PRO	15.24mt. (50.0 ft.)		DMXCABLE	2019.6.10	


PREFAB DMX CABLE:




CABLE CONSTRUCTION:



DMX605 is a professional AES/EBU digital cable
 4*0.34mm' with flexible PVC covered overall jacket-
 OFC (Oxygen Free Copper)
 Conductor drains mm: OFC tinned 30x0.12
 Conductor insulation: LPE white+blue, 1.2mm
 Nominal Impedance: 110ohm
 Conductor resistance: <80ohm/Km
 1st Shield: tinned copper 96*0.12 tinned wire braid+al foil
 2nd shield:-
 Shield resistance: 30ohm/km
 Capacity inner conductor: 64pf/m
 Working Temperature min/Max: -20°C/+70°C

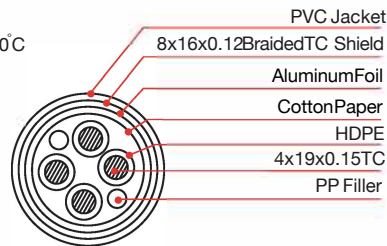

WIRING METHOD:

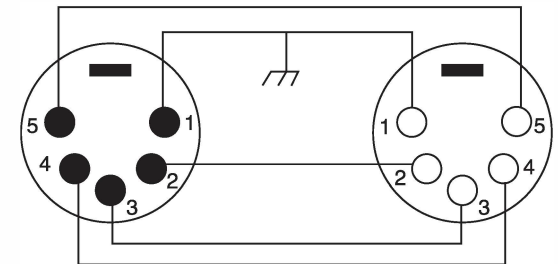

PRINTING WORD ON CABLE:

ACCU-CABLE - Quality High Performance Cables Designed To "Extend Your World" -