




LED Array

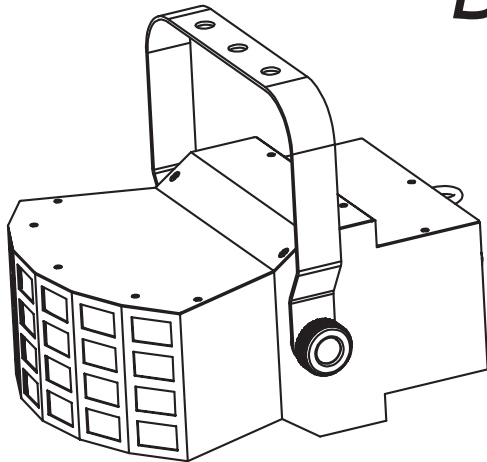

SPECIFICATIONS:

| | |
|---------------------------|-------------------------|
| Model: | LED Array |
| Supply Voltage: | 100 - 240V 50Hz/60Hz |
| LED: | 2 x 9W 3-in1 RGB LEDs |
| Weight: | 5 lbs./2.3kgs |
| Size: | 11.75"L x 8.75"W x 6"H |
| Fuse: | 1 Amp |
| Power Consumption: | 30W |
| Working Position: | Any Safe position |
| Duty Cycle: | None |
| Colors: | Multiple Colored Lenses |
| Warranty: | 1 Year |

CAUTION! Please read and understand these instructions before installing or operating this unit.

Caution! Never open unit when in use. Always disconnect main power before replacing the fuse. Remember to always replace with the exact same type of fuse.

Operating Instructions:

The LED Array is a powerful effect for clubs and dj's. The LED Array creates a dramatic cluster of multi-dichroic colored beams. This unit features an external microphone that allows the beams to be triggered by sound. The LED Array's beams bounce up and down to the beat of the music. The LED Array is ready to be hung or set on the ground in a safe position. When mounting this unit to truss be sure to use a clamp. Plug the unit in to a standard wall outlet. After plugging the unit in, the fixture will react to the beat of the music via the sound active external microphone. The unit has a sensitivity knob on the rear of the unit that makes more or less sensitive to sound. Turning the knob in clockwise direction will make the unit more sensitive to sound. The unit requires sound to activate the movement.

1 Year Limited Warranty: Eliminator Lighting warranty is valid from the date of purchase. Our 1 year limited warranty covers manufacturing defects only. Serial number, place of purchase with dated valid receipt must be submitted at time of service. Eliminator Lighting warranty does not cover items or parts prone to wear and tear: lamps, fuses, brushes and belts. Eliminator Lighting warranty is only valid with-in the United States.