

# Focus Profile



Light Efficiency:



Light Quality:



Color Temperature:



Output: 8298 lm

Peak: 1078109 cd


Power: 588 W

PF: 1.0



Beam Angle

5.8°

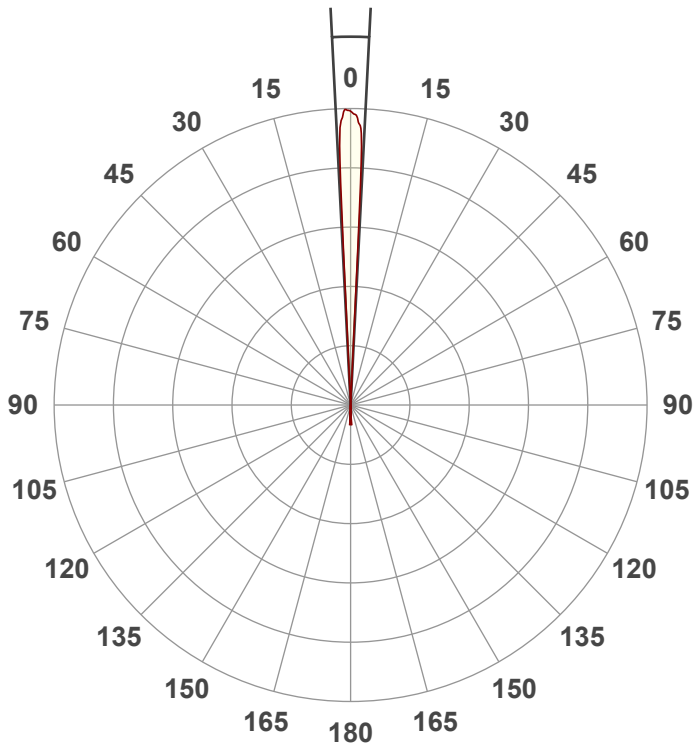

Test:


Zoom In CRI

Date:

9/8/2021

Note:


PT# 0077



CIE 1931  
x: 0.321  
y: 0.324

Spectra



Dominant Wavelength: 829nm

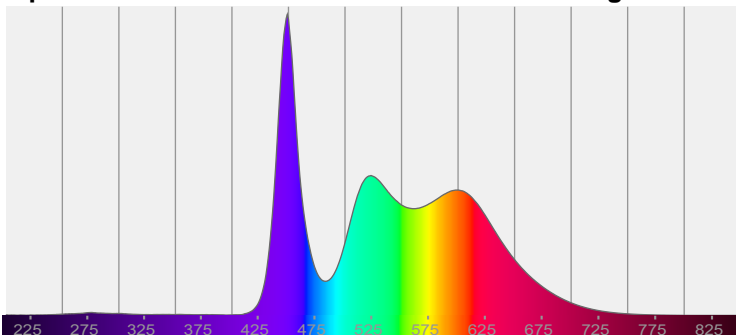


Power

Voltage: 114 V  
Current: 5.16 A  
Frequency: 0 Hz


## Color Details

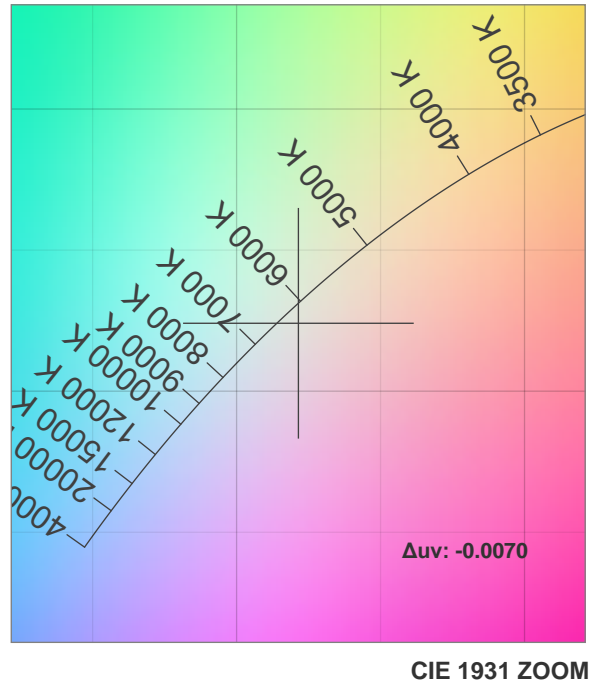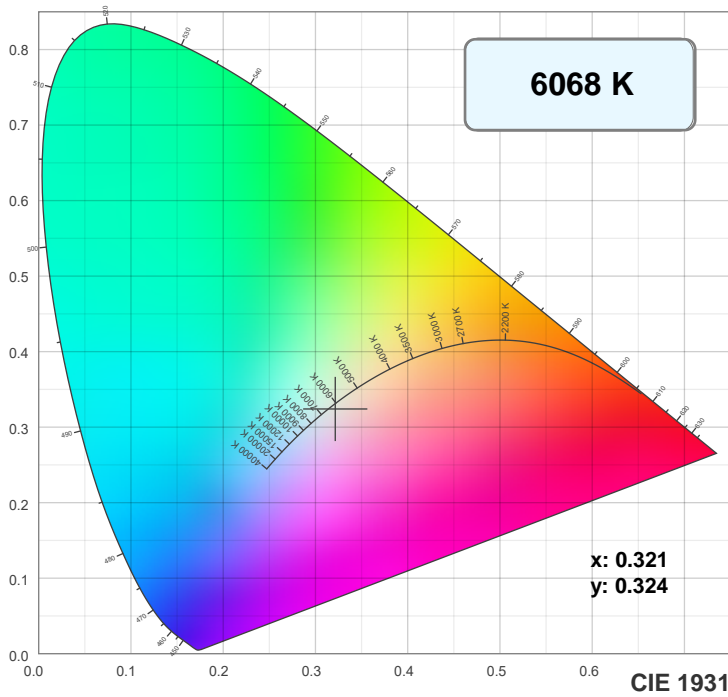

TM30: 84.2

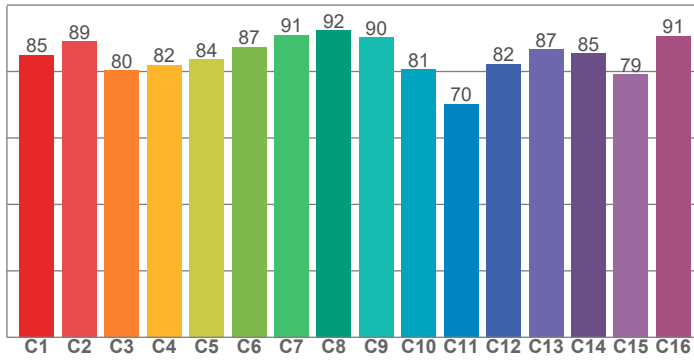

CRI: 87.7 (R1-R8)

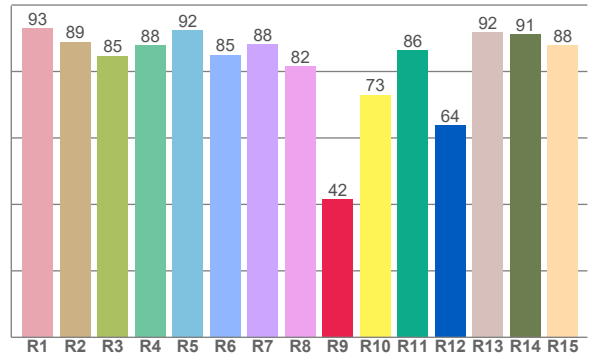

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
92.9	88.9	84.7	87.8	92.5	85.0	88.2	81.7	41.6	73.0	86.3	63.7	91.8	91.1	87.9


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
84.9	89.1	80.3	81.9	83.6	87.4	91.0	92.4	90.3	80.6	70.3	82.3	86.6	85.4	79.1	90.7

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
88.8	93.7	72.5	76.5	87.7	89.0	89.2	96.3	90.6	82.1	83.7	84.9	87.2	79.5	83.7


CQS: 84.5

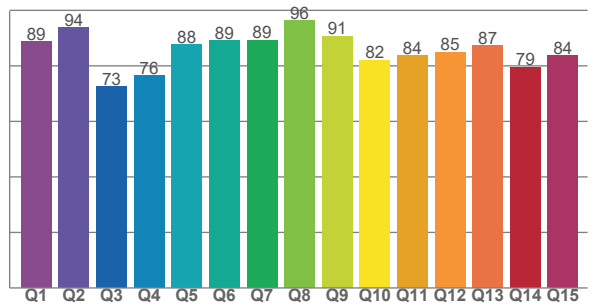

## Color Parameters

Color Temperature	Color Rendering Index	Red Component	Color Fidelity	Color Gamut	Color Quality Scale	Color Coordinate CIE 1931	Color Coordinate CIE 1931	Color Coordinate	Color Coordinate	Color Deviation from Black Body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	$\Delta uv$
6068 K	87.7	41.6	84.2	103.0	84.5	0.321	0.324	0.206	0.311	-0.0070

## Beam Details

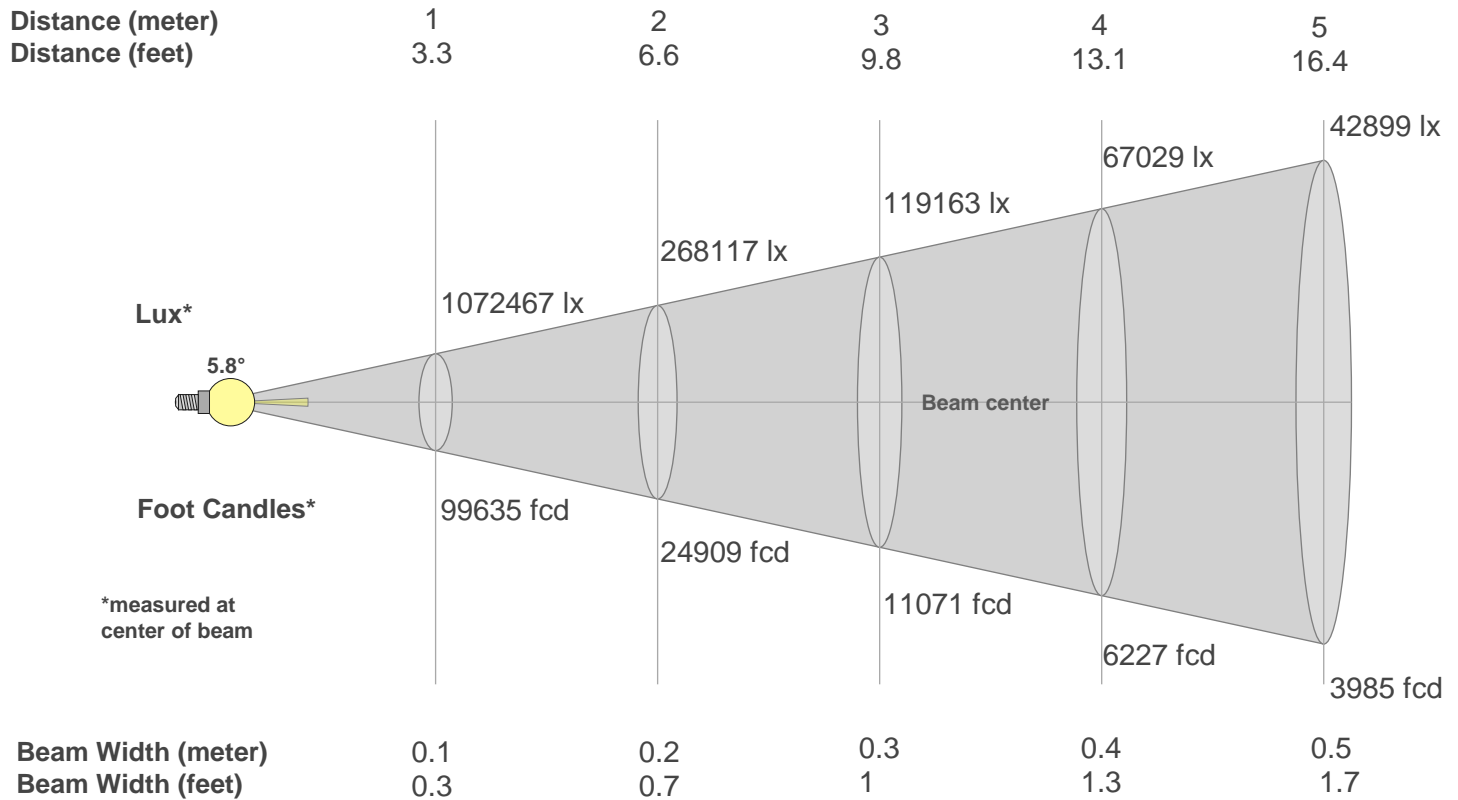

Beam Intensities from 1-20m

m	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
ft	3.3	6.6	9.8	13.1	16.4	19.7	23	26.2	29.5	32.8	36.1	39.4	42.7	45.9	49.2	52.5	55.8	59.1	62.3	65.6
lx	1072467	268117	119163	67029	42899	29791	21887	16757	13240	10725	8863	7448	6346	5472	4767	4189	3711	3310	2971	2681
fcd	99635.4	24908.9	11070.6	6227.2	3985.4	2767.7	2033.4	1556.8	1230.1	996.4	823.4	691.9	589.6	508.3	442.8	389.2	344.8	307.5	276	249.1

Intensities in 0° C-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
1.1M	1.1M	1.0M	0.4M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M
100%	100%	91%	41%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%

Intensities in 90° C-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
1.1M	1.1M	1.0M	0.4M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M
100%	100%	91%	41%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%

Intensities in 180° C-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
1.1M	1.1M	1.0M	0.4M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M
100%	98%	90%	41%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%

Intensities in 270° C-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
1.1M	1.1M	1.0M	0.4M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M
100%	98%	90%	41%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%

Beam Angle 50%	Field Angle 10%	Cutoff Angle 2,5%	Intensity Ratio in 120° Cone	Intensity Ratio in 90° Cone
5.8°	6.8°	6.9°	100.0%	100.0%